

GENERAL NOTES:


1. THE LOCATIONS OF UNDERGROUND UTILITIES MUST BE VERIFIED IN THE FIELD PRIOR TO CONSTRUCTION.
2. ALL UTILITY RELOCATIONS TO BE PERFORMED AHEAD OF PROPOSED HEADHOUSE AND ELEVATOR CONSTRUCTION. UTILITIES TO BE PROTECTED IN PLACE DURING CONSTRUCTION.
3. SEE CIVIL DRAWINGS FOR DETAILED INFORMATION ON PROPOSED SIDEWALK, ROADWAY, AND DRAINAGE WORK.
4. THE CONTRACTOR SHALL MAINTAIN A MINIMUM 6-INCH CLEARANCE BETWEEN ALL UNDERGROUND STRUCTURES AND THE NEW WATER MAINS.
5. EXISTING WATER MAINS SHALL BE CUT AND PLUGGED AS APPROVED BY THE CITY ENGINEER.
6. ALL DISTANCES SHOWN ARE IN DISTRICT STANDARD MEASUREMENT.
7. PRIVATE COST AGREEMENT TO BE FINALIZED BETWEEN SEPTA AND PHILADELPHIA WATER DEPARTMENT (PWD).
8. PROPOSED SEWERS AND WATER MAINS SHALL BE LOCATED SUCH THAT THE WATER MAIN IS COMPLETELY OUTSIDE A LINE DRAWN ON A 2 VERTICAL TO 1 HORIZONTAL SLOPE FROM THE OUTSIDE TRENCH LINE OF THE SEWER, OR THERE EXISTS A MINIMUM OF 3'-0" CLEARANCE BETWEEN THE SEWER AND WATER MAIN TRENCH, WHICHEVER IS GREATER. IN RARE CASES DUE TO EXCESSIVE UTILITIES, A WATER MAIN MAY BE APPROVED TO BE PLACED IN CLOSE PROXIMITY TO THE SEWER, BUT THIS MUST BE APPROVED BY THE WATER/SEWER ENGINEERING SUPERVISOR.
9. UTILITY COORDINATION TO BE PERFORMED IN ACCORDANCE WITH PENNDOT PUBLICATION 16M, DESIGN MANUAL PART 5, "UTILITY RELOCATION."
10. ALL UTILITIES THAT ARE TO REMAIN IN PLACE DURING SHEET AND SHORING INSTALLATION ARE TO BE PROTECTED IN PLACE. THE MEANS AND METHODS OF THIS PROTECTION IS TO BE DEVELOPED AND DESIGNED BY THE CONTRACTOR.
11. CONTRACTOR TO CONTACT PECO IMMEDIATELY FOLLOWING BID BEING AWARDED TO COORDINATE REMOVAL OF EXISTING ABANDONED FACILITIES. THIS CAN BE DONE VIA COMPLETION OF A PHILADELPHIA NEW BUSINESS APPLICATION TO BE EMAILED TO PHILANEWBUSINESS@EXELONCORP.COM OR CALL 1-800-454-4100.
12. CONTRACTOR TO CONTACT VERIZON IMMEDIATELY FOLLOWING BID BEING AWARDED TO COORDINATE NEW TELEPHONE SERVICE CONNECTION AND TERMINATION/REMOVAL OF EXISTING SERVICE VIA GPIS.
13. WHEN A HPFS HYDRANT IS TO BE REMOVED: THE CONTRACTOR SHALL REMOVE THE HIGH PRESSURE FIRE HYDRANT, AND ABANDON THE HIGH PRESSURE FIRE SYSTEM HYDRANT VALVE MANHOLE AS SHOWN ON THE CONTRACT DRAWINGS. EXCAVATE AND EXPOSE THE ENTIRE HYDRANT ABOVE AND BELOW GRADE. CLOSE THE FIRE HYDRANT VALVE. SAWCUT THE STANDPIPE AND STEM 2 FEET BELOW STREET GRADE. TIE OFF THE STEM IN ITS CLOSED POSITION TO PREVENT THE CONCRETE GETTING INTO THE ELBOW. FILL THE REMAINING PORTION OF THE STANDPIPE WITH CONCRETE. THE HYDRANT REMOVED WILL BECOME THE PROPERTY OF THE CONTRACTOR WHO IS RESPONSIBLE FOR ITS DISPOSAL. BACKFILL THE TRENCH WITH SELECT GRANULAR MATERIAL - 2RC UP TO SUBGRADE ELEVATION. COMPACT THE TRENCH AND RESTORE DISTURBED CONCRETE CURBING AND FOOTWAY PAVING.

LEGEND:

	Existing	PROPOSED
ELECTRIC (UNDERGROUND)	--- E ---	--- E ---
TELEPHONE	--- T ---	--- T ---
FIBER OPTIC	--- FO ---	--- FO ---
SANITARY SEWER	--- S ---	--- S ---
GAS	--- G ---	--- G ---
WATER	--- W ---	--- W ---
SURVEY	---	---
UTILITY REMOVAL	---	---

UTILITY FEATURES:

EXISTING MANHOLE	⊙
PROPOSED MANHOLE RESET	⊙
EXISTING FIRE HYDRANT	⊙
PROPOSED FIRE HYDRANT RESET	⊙
EXISTING UTILITY VALVE	⊙
PROPOSED PIPE END CAP	⊙
EXISTING JUNCTION BOX	⊙
PROPOSED 45° BEND	⊙

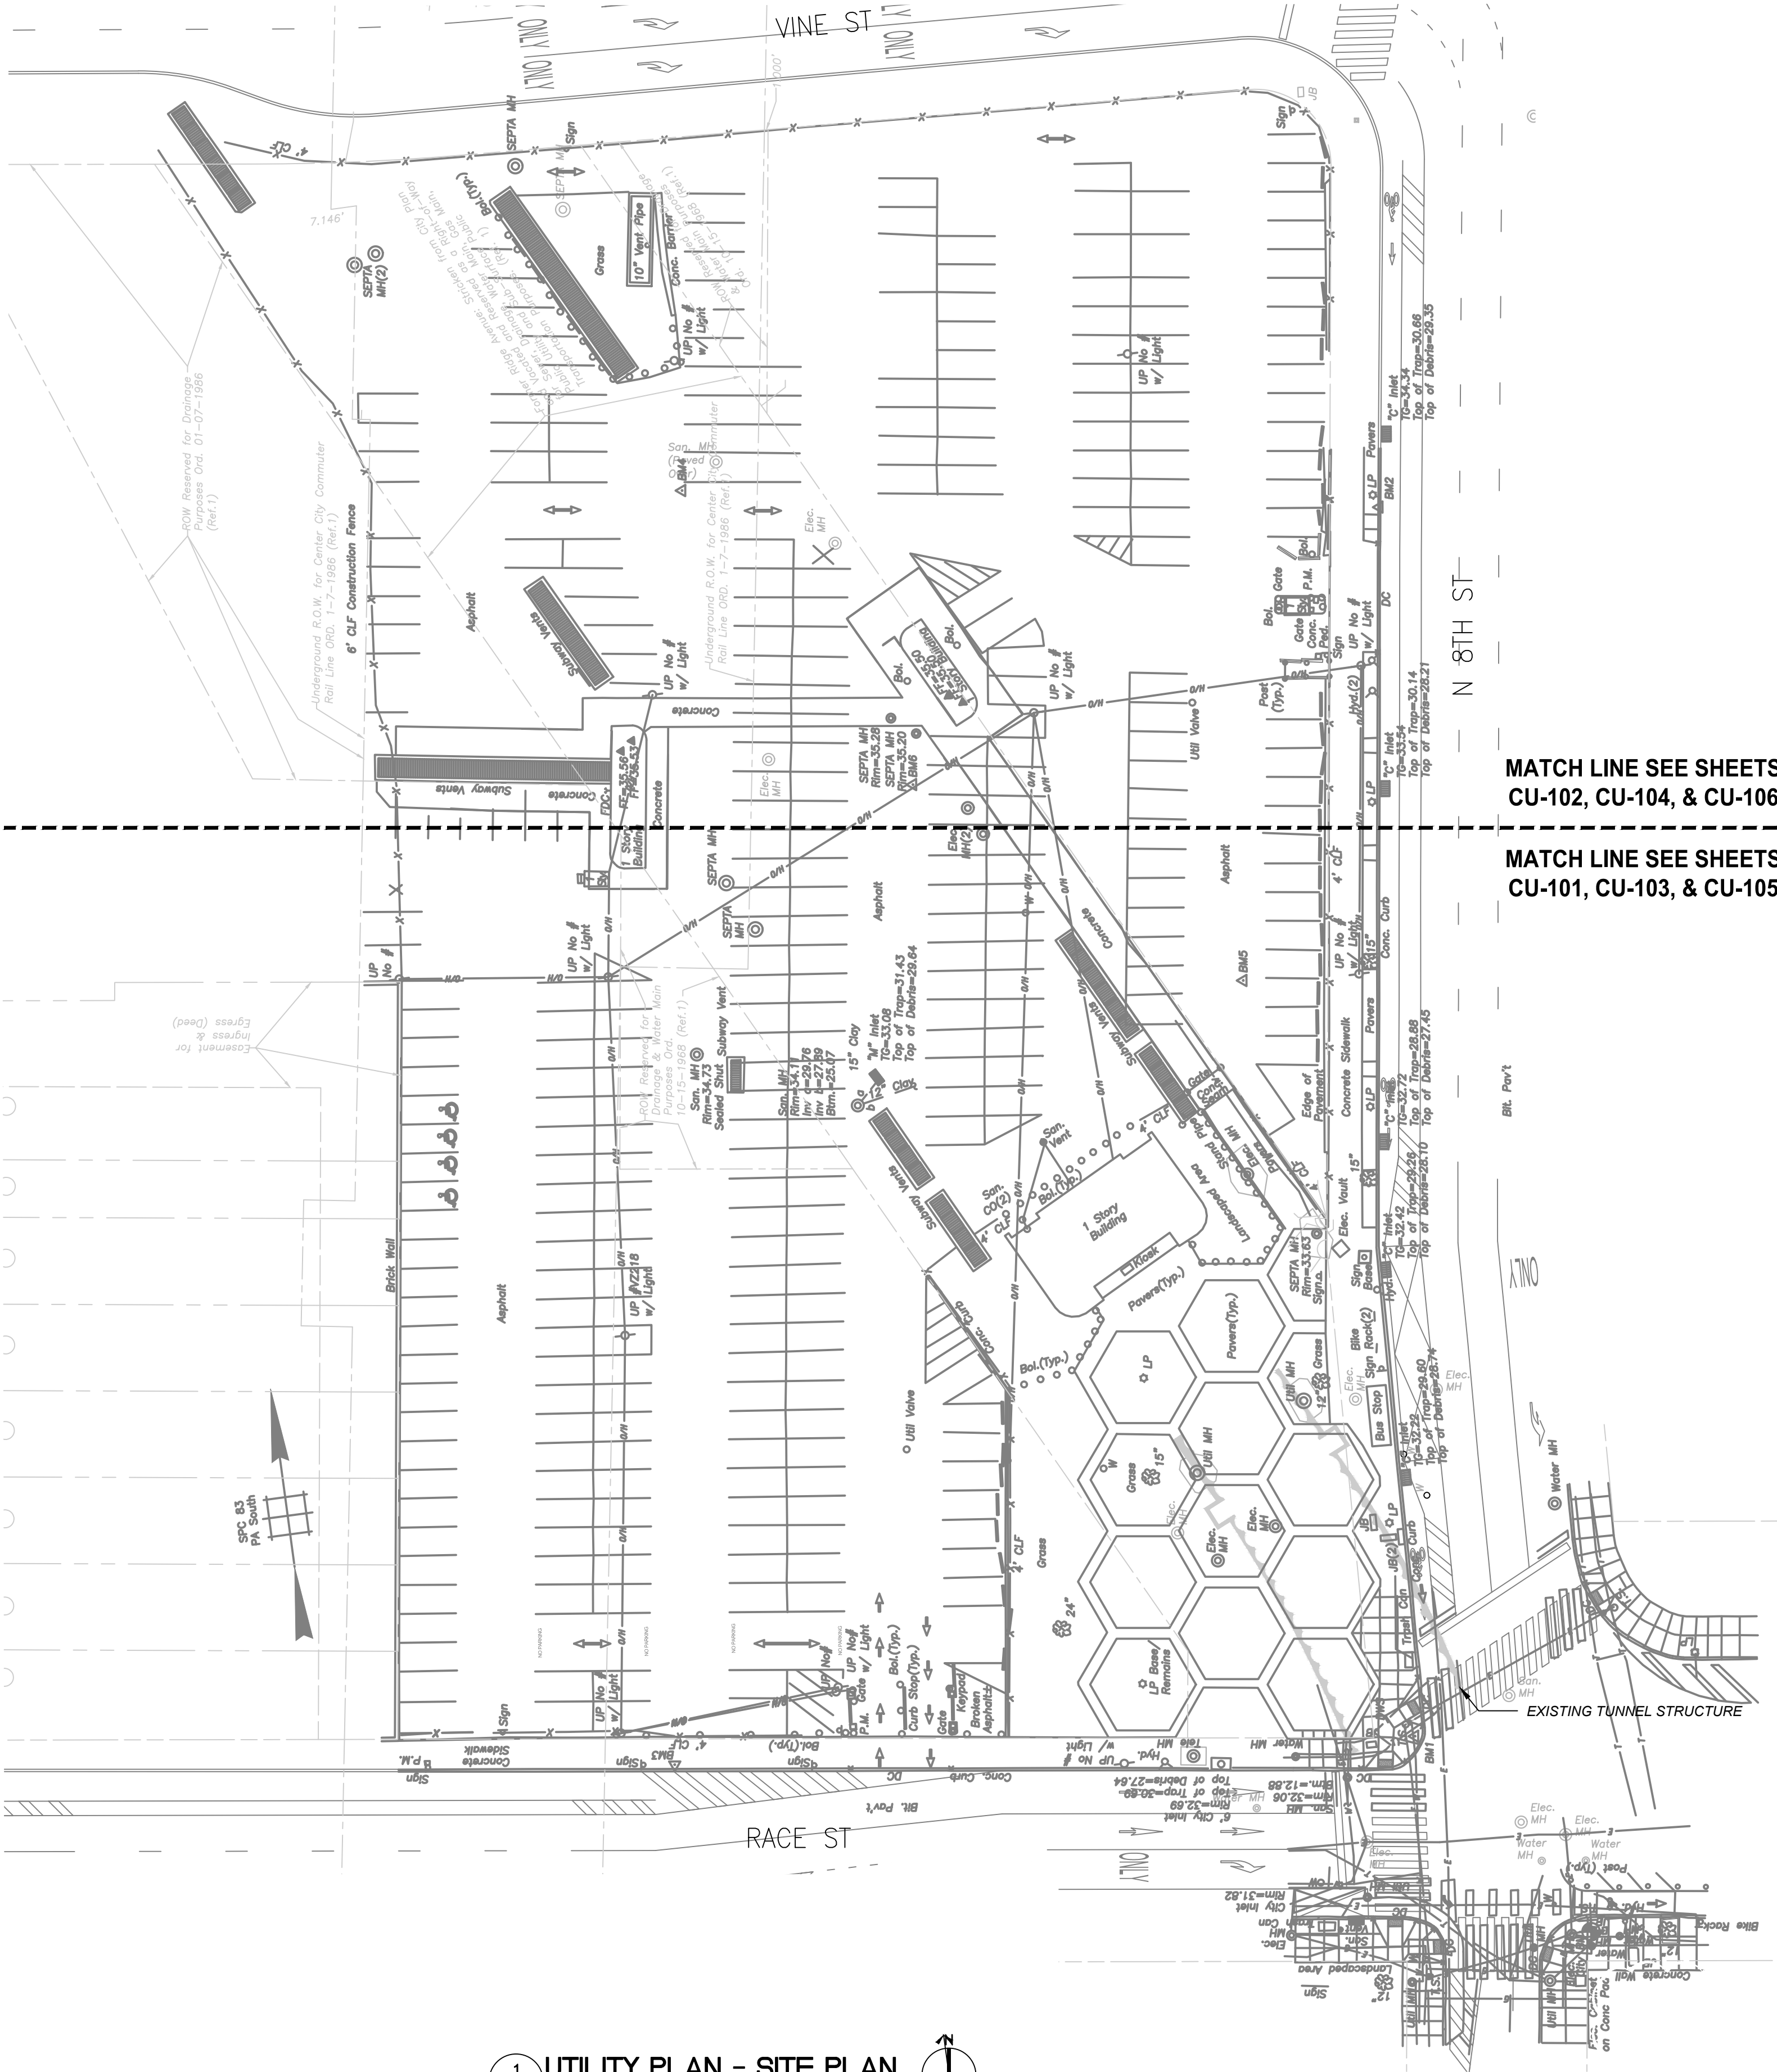

MATCH LINE SEE SHEETS
CU-102, CU-104, & CU-106

MATCH LINE SEE SHEETS
CU-101, CU-103, & CU-105

1
CU100
UTILITY PLAN - SITE PLAN
SCALE: 1" = 30'
0 30' 60'

NOTE:
THIS SHEET SHALL BE PRINTED IN COLOR



Dial 8-1-1 or 1-800-242-1776 not less than 3 business days nor more than 10 business days prior to the start of excavation.

Coordinate your projects via Coordinate PA at www.paonecall.org.

Pennsylvania One Call System Serial Number

20231581328, 20243382506, 20250561724



1234 MARKET ST, 13TH FL.
PHILADELPHIA, PA 19107

CHIEF ENGINEER - EM&C

CHIEF ENGINEER OFFICER - B&B

CHIEF RAIL TRANSIT OFFICER

SYSTEM SAFETY

DIRECTOR OF ENGINEERING - B&B

MANAGER - ARCHITECTURE / ENGINEERING

PROJECT MANAGER



REV	DATE	DESCRIPTION	BY	CHKD	APD
0	05-20-2026	IFB SUBMISSION	JW	CRE	SR

Chinatown Station
8th St & Race St, Philadelphia, PA 19107
**SEPTA South Broad Street
Stations ADA Improvement Project**
CIVIL
UTILITY PLAN - SITE PLAN

SCALE:

1" = 30'

DATE:

05-20-2026

WORK ORDER NO.:

S-977278

SHEET NUMBER

CU-100

SHT. NO.:

8 OF 368

ARCHIVE NO.:

COMPUTER FILE NO.:

REV. NO.:

0